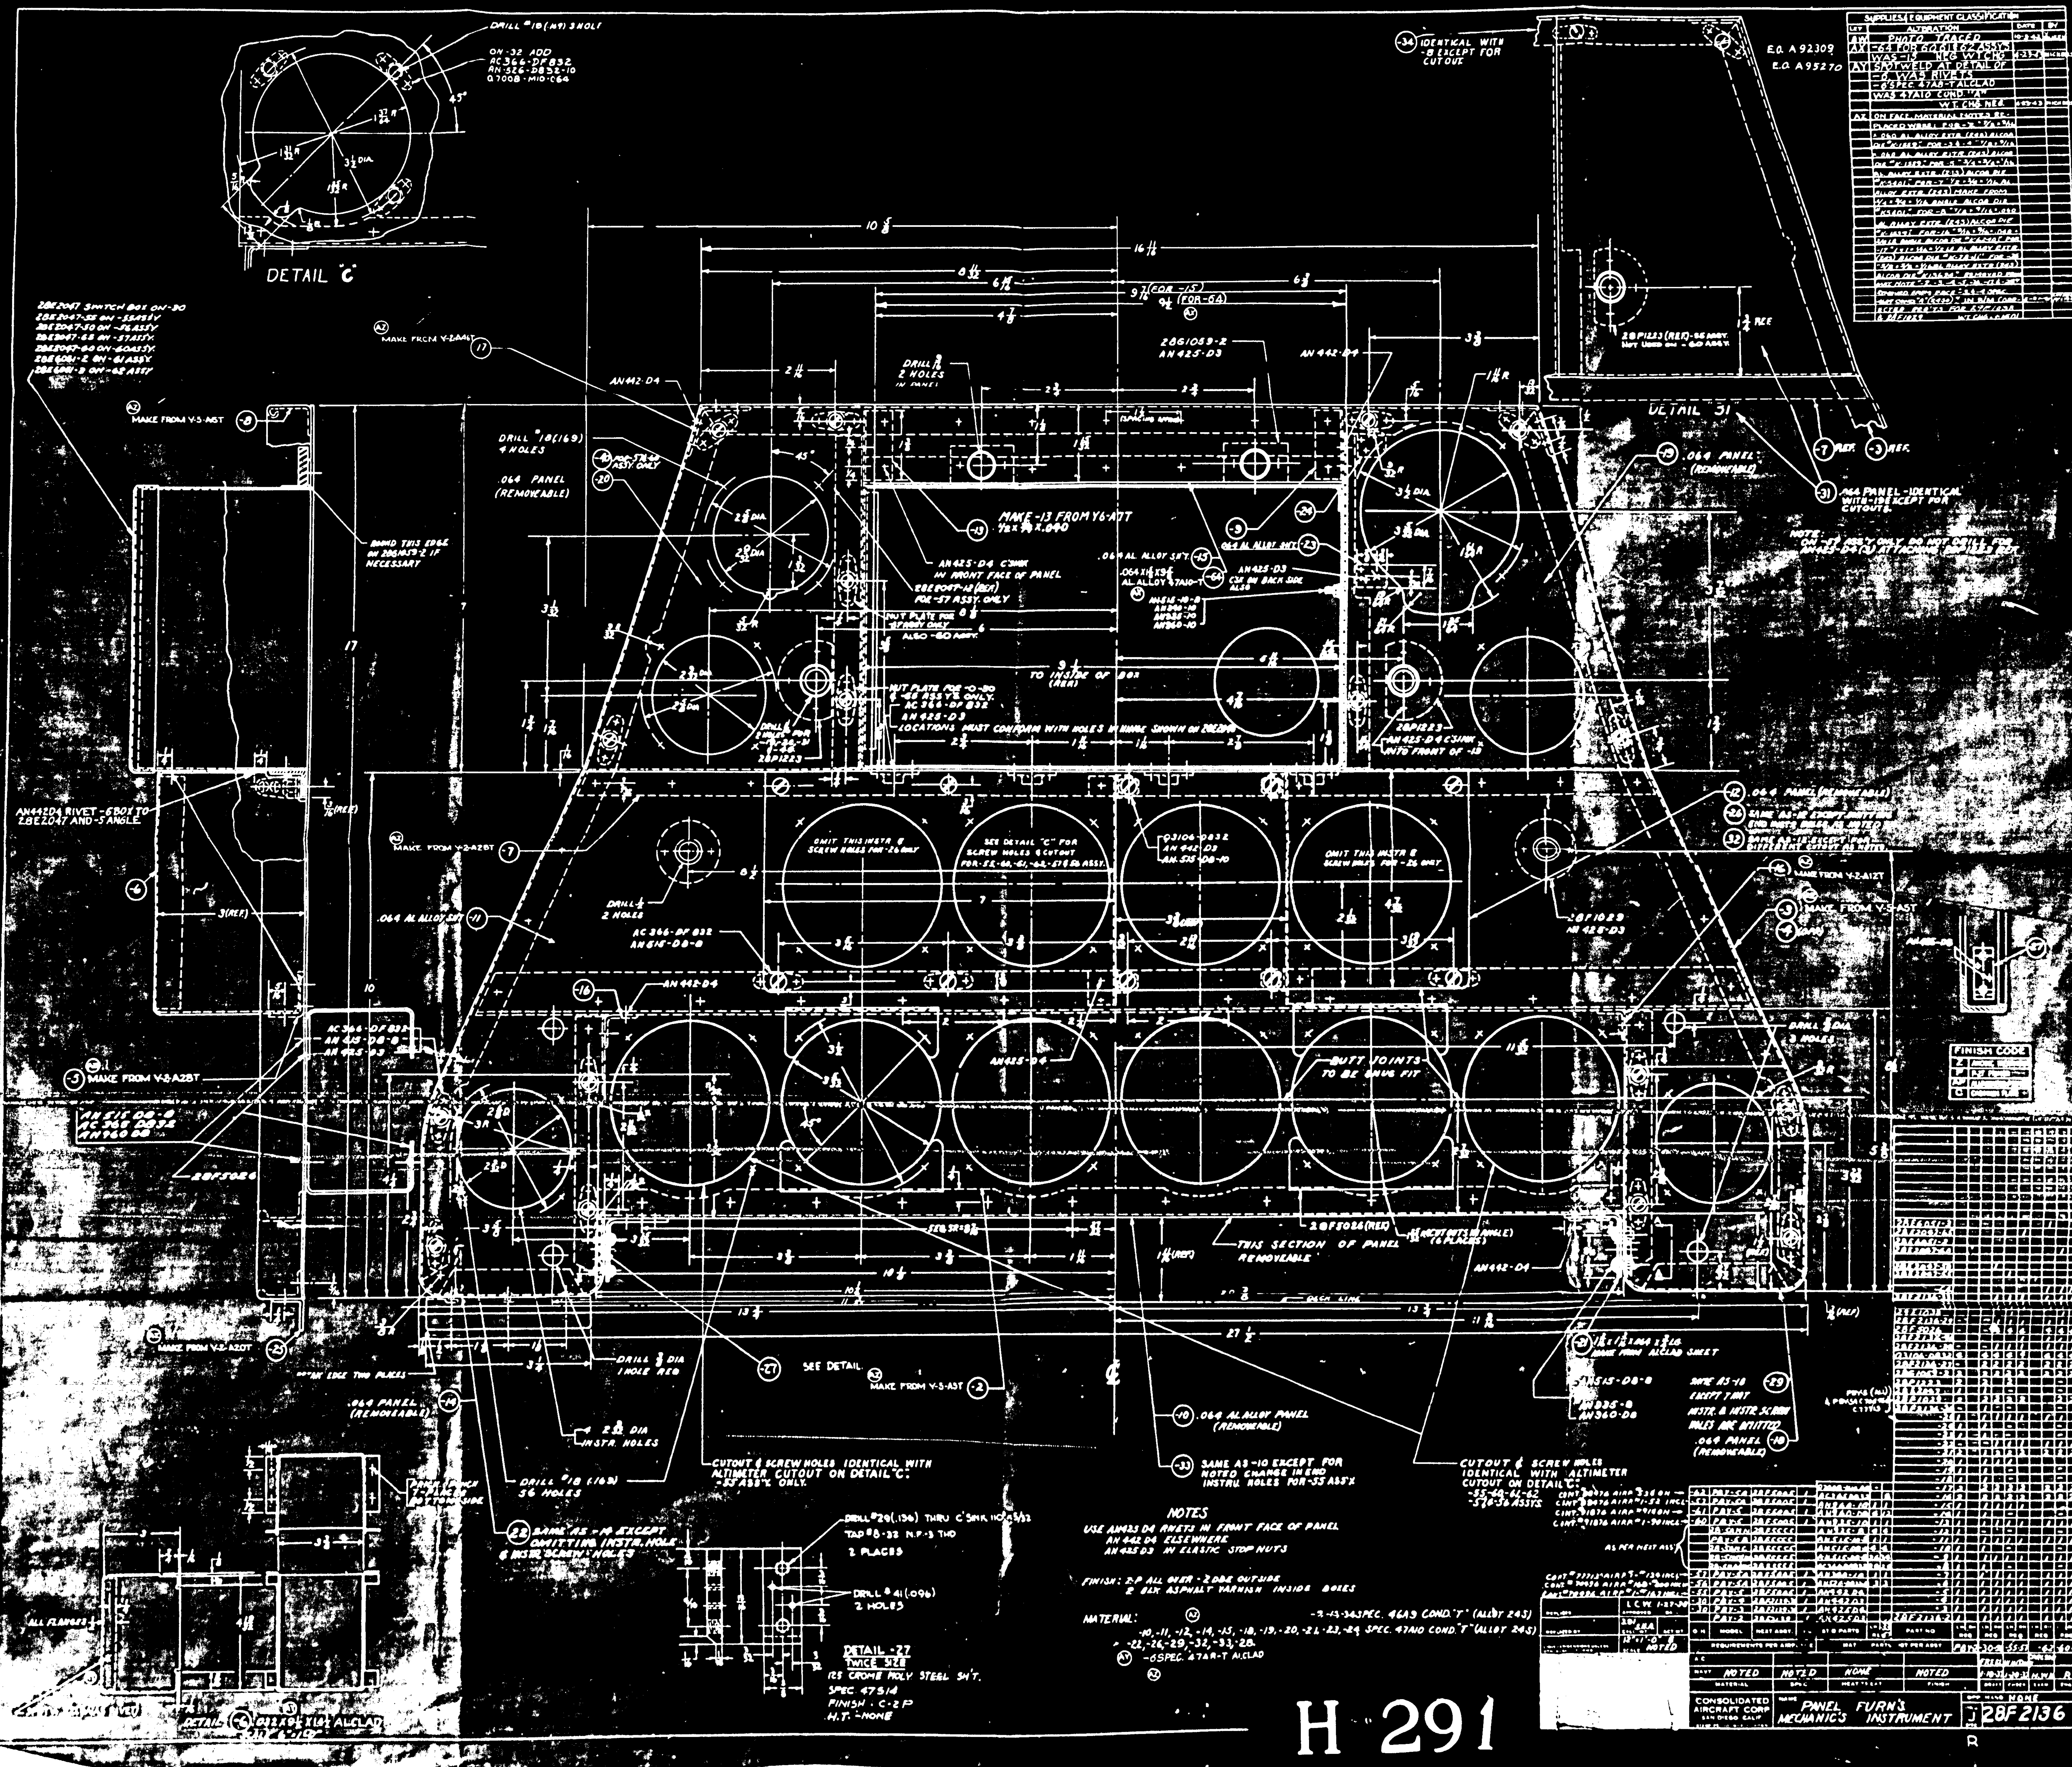

DETAIL "C"
DETAIL "31"
NOTES
USE AN425 D4 RIVETS IN FRONT FACE OF PANEL
AN 442 D4 ELSEWHERE
AN 425 D3 IN ELASTIC STOP NUTS
FINISH: Z-P ALL OVER - 2 DBE OUTSIDE
2 BLK ASPHALT VARNISH INSIDE BOXES
MATERIAL:
-10, -11, -12, -14, -15, -18, -19, -20, -21, -23, -24 SPEC. 47A10 COND. "T" (ALLOY 24S)
-22, -26, -29, -32, -33, -28
-6 SPEC. 47AR-T ALCLAD
-10 .064 AL ALLOY PANEL (REMOVEABLE)
-33 SAME AS -10 EXCEPT FOR NOTED CHANGE IN END INSTRU HOLES FOR -55 ASS'Y
CUTOUT & SCREW HOLES IDENTICAL WITH ALTIMETER CUTOUT ON DETAIL "C"
THIS SECTION OF PANEL REMOVABLE
BUTT JOINTS TO BE SNUG FIT
MAKE -13 FROM Y6-A27
DETAIL -27 TWICE SIZE
CONSOLIDATED AIRCRAFT CORP SAN DIEGO CALIF
PANEL FURN'S MECHANIC'S INSTRUMENT
28F2136
H 291